



SCT-10S


FEATURE

- Split-core type with clip-on design, easy installation at set-up devices and distribution board
- Compact size works up to 80A AC
- Cost-effective solution
- Two ends hook attached to secure primary conductor with cable-ties
- Applicable for power saving facilities and overload protection systems
- Isolated plastic case recognized according to UL 94-V0

SPECIFICATION



Model No.	SCT-10S
Primary Rated Current	AC 5A/10A/20A/30A/40A/50A/60A/70A/80A (50/60Hz)
Secondary Output Current	DC 4~20mA, 2-wire Loop Powered
Accuracy	Class 0.5($\pm 0.5\%$ of full scale) , $R_L < 300\Omega$
Temperature Coefficient	$\pm 0.02\%$ of full scale / $^{\circ}\text{C}$
Power Supply	DC 24V ($\pm 10\%$)
Primary Conductor Hole	$\varnothing 10\text{mm}$
Enclosure Material	NYLON Flame Retardant(UL-94V0)
Dielectric Strength	1000V AC/1min, between primary conductor hole and output
Insulation Resistance	$> 100\text{M}\Omega/500\text{V DC}$, between primary conductor hole and output
Weight	Approx. 50g
Operating Condition	$-20^{\circ}\text{C} \sim 50^{\circ}\text{C}$, below 80% RH , no condensation
Storage Condition	$-30^{\circ}\text{C} \sim 70^{\circ}\text{C}$, below 70% RH , no condensation

CONNECTION DIAGRAM

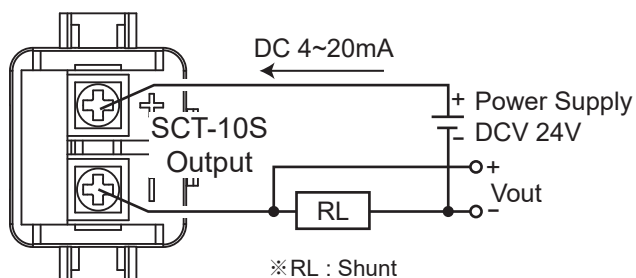

DER EE[®] Split Core Current Transformer

SCT-10S Graphic of Primary Current and Secondary Current

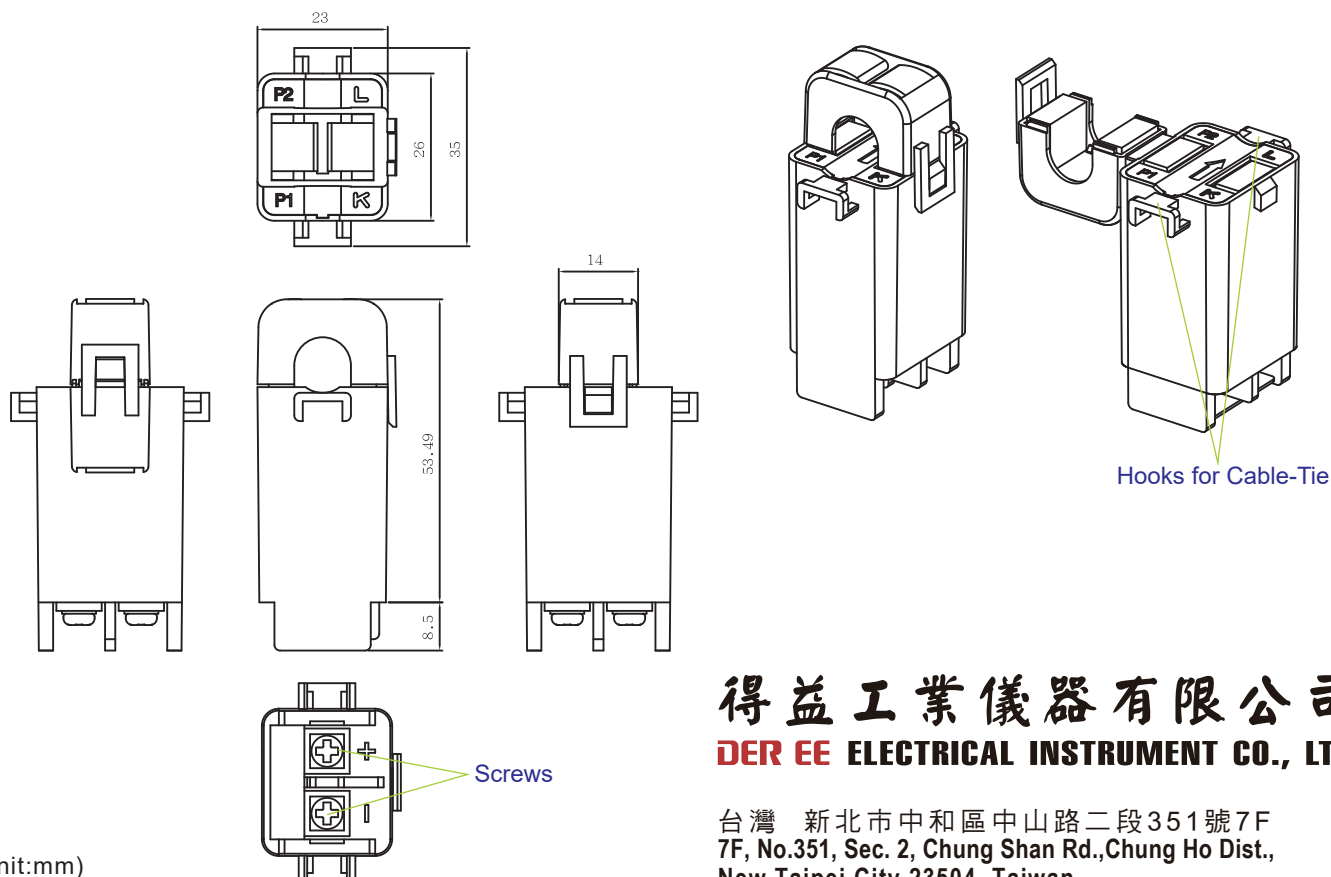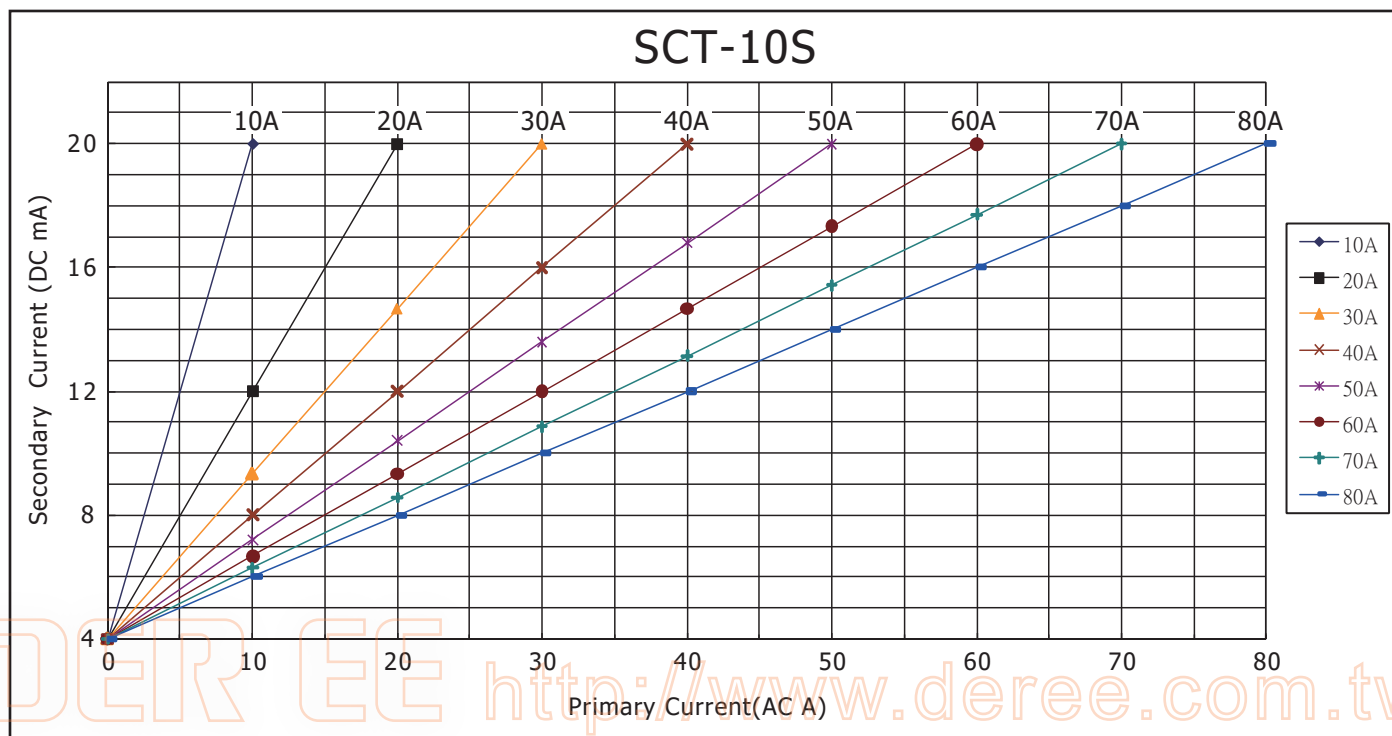

(Unit:mm)

得益工業儀器有限公司
DER EE ELECTRICAL INSTRUMENT CO., LTD.

台灣 新北市中和區中山路二段351號7F
 7F, No.351, Sec. 2, Chung Shan Rd., Chung Ho Dist.,
 New Taipei City 23504, Taiwan
 TEL:886-2-2226-6789(REP) FAX:886-2-2226-7979
 E-mail:deree@deree.com.tw <http://www.deree.com.tw>

